




Standard Accessories




Performance Curve

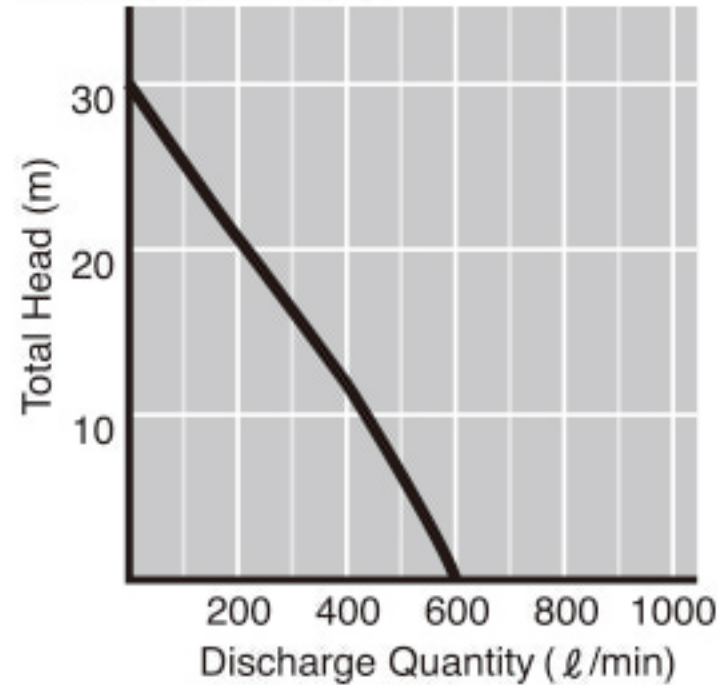

Specification Sheet

PUMP	
Connection Port Diameter	2 inch
Connection thread	Outer Pipe Thread
Total head	30m
Max. suction head	7m
Max. capacity	600L / min
ENGINE	
Type	4-stroke, OHV, forced air cooled
Displacement	123 cc
Max. Output	4.0ps / 4000rpm
Rated output	3.0ps / 3600rpm
Fuel	Unleaded gasoline
Fuel tank capacity	4.5L
Starting system	Recoil starter
Dry weight	27 kg
LxWxH (mm)	391 x 502 x 454

Pumping Capacity(L/min)

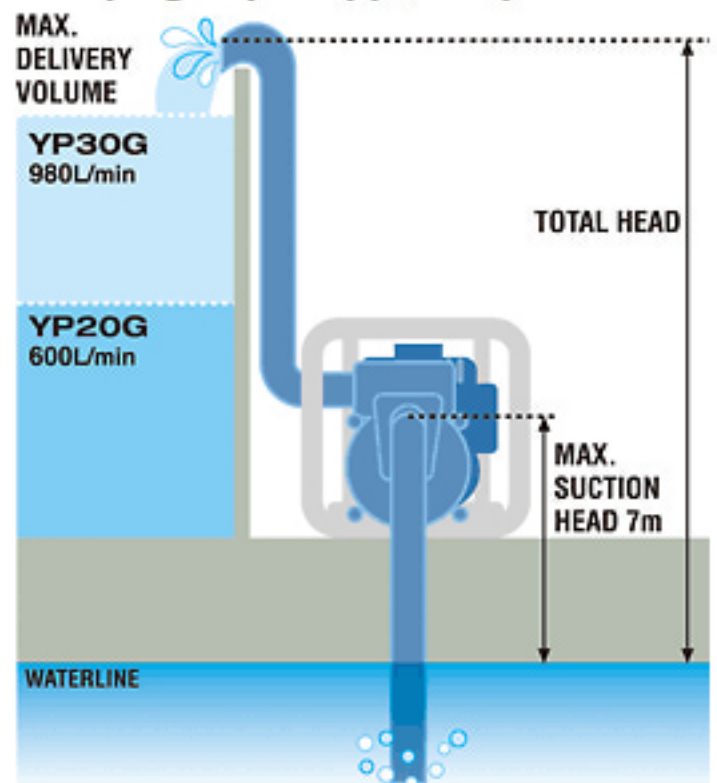

Reliable Performance

The YP20G and 30G use a high-power engine. This allows them to work hard for you in various fields. In addition, the well-balanced design and precision construction result in significant reductions in gasoline and oil consumption. This gives the YP20G and 30G excellent cost-performance.